

**ISUZU BERPENGALAMAN DENGAN
MESIN COMMON RAIL SEJAK 2011**

**ISUZU
GIGA
FVZ**



**TRUK TANGGUH
DAN BERTENAGA**

**euro4
ready**

*Gambar pada brosur ini hanya ilustrasi, mungkin ada perbedaan dengan aktual kendaraan
**Mesin common rail pada Isuzu Giga sejak tahun 2011

REAL PARTNER. REAL JOURNEY.

SPESIFIKASI TEKNIS


SPESIFIKASI	FVZ N HP	FVZ U HP	FVZ L HP MX
SISTEM PENGGERAK RODA / DRIVE TRAIN			
Sistem Penggerak Roda / Drive Train	6X4		
DIMENSI / DIMENSION			
Panjang / Overall Length [OAL]	mm	8,650	11,945
Lebar / Overall Width [OW]	mm	2,485	
Tinggi / Overall Height [OH]	mm	2,975	
Jarak Sumbu / Wheelbase [WB]	mm	4,115 + 1,370	5,825 + 1,370
Julur Depan / Front Overhang [FOH]	mm	1,250	
Julur Belakang / Rear Overhang [ROH]	mm	1,915	1,375
Jarak Terendah ke Tanah / Minimum Clearance [HH]	mm	285	
Dimensi Chassis	mm	870 x 305 x 8	870 x 305 x 9
Jejak Depan / Front Tread [AW]	mm	2,060	
Jejak Belakang / Rear Tread [CW]	mm	1,850	
Cabin to End [CE]	mm	6,545	9,840
MESIN / ENGINE			
Model	6HK1-TCS		
Tipe / Type	Direct Injection, OHC, 6 Cylinder, Heavy Duty Commonrail, VGS Turbo Intercooler		
Sistem Kontrol Emisi	EURO4 with EGR & DOC		
Diameter x Langkah / Bore x Stroke	mm	115 X 125	
Isi Silinder / Piston Displacement	cc	7,790	
Tenaga Maksimum / Maximum Power	PS/rpm	285 / 2,400	
Torsi Maksimum / Maximum Torque	Kgm/rpm	90 / 1,450 - 2,400	
TRANSMISI / TRANSMISSION			
Model	ES11109DD		
Perbandingan Gigi / Gear Ratio			
	Low	12.638	
	1st	8.807	
	2nd	6.550	
	3rd	4.768	
	4th	3.548	
	5th	2.482	
	6th	1.846	
	7th	1.344	
	8th	1.000	
	Rev	13.210	
Perbandingan Gigi Terakhir / Final Gear Ratio		6.143	

SPESIFIKASI	FVZ N HP	FVZ U HP	FVZ L HP MX
BERAT / WEIGHT			
Berat Kosong Kendaraan / Curb Weight	kg	7,430	8,070
Berat Total Kendaraan / Gross Vehicle Weight [GW]	kg	26,000	
Kapasitas Gardan Depan / Capacity Front Axle	kg	6,000	
Kapasitas Gardan Belakang / Capacity Rear Axle	kg	20,000	
REM / BRAKE			
Tipe / Type	Full Air		
Rem Kaki / Service Brake	Full Air dengan Drum Brake		
Rem Tangan / Hand Brake	Mekanisme Tuas, dengan Air Valve		
Sistem Pengereman Gas Buang / Exhaust Brake	Ada		
RODA / TYRE			
Ukuran Ban	11.00-20-16PR [RIB LUG]		
Ukuran Velg	10STUD 20X7.50T		
SUSPENSI / SUSPENSION			
Depan / Front	Rigid Suspension dengan Multi Leaf Spring		
Belakang / Rear	Semi-elliptical alloy steel leaf dengan 6-link torque rod		
LAIN-LAIN / OTHERS			
Kapasitas Tangki / Fuel Tank Capacity	ltr	200	
Radius Putar Minimum / Minimum Turning Radius	m	8.4	10.8
Daya Tanjak Maksimum / Maximum Gradeability	%	45	
Kecepatan Maksimum / Maximum Speed	km/h	83	
Aki / Accu	V-Ah	2 x 12 V - 65 Ah	
Alternator	V-A	24 - 60	
Semi Float (Rubber) Damper Cabin Suspension	Ada		
Audio Head Unit	Ada		
USB Charging System	Ada		
APAR (Alat Pemadam Api Ringan)	Ada		
PTO	Transmission PTO	-	Flywheel PTO
Air Seat Suspension	Ada		
Kamera Mundur / Reverse Parking Camera	-	Ada	-
Under Guard	Ada		
Garansi / Warranty	1 Tahun / 100,000 km		

* Untuk meningkatkan mutu dan penyesuaian dengan perkembangan teknologi, spesifikasi dapat berubah sewaktu-waktu tanpa pemberitahuan.


** Ilustrasi merupakan contoh sebagian aplikasi di lapangan.

DIMENSI

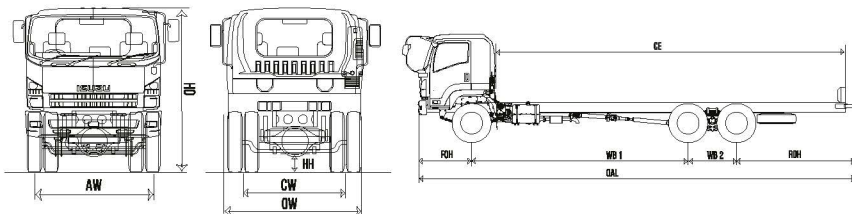

APLIKASI

TANGKI



DUMP



FLAT BED



MIXER



SCAN INI
UNTUK
INFORMASI
LEBIH LANJUT

